


ECC-3270



外型尺寸 / Appearance Size


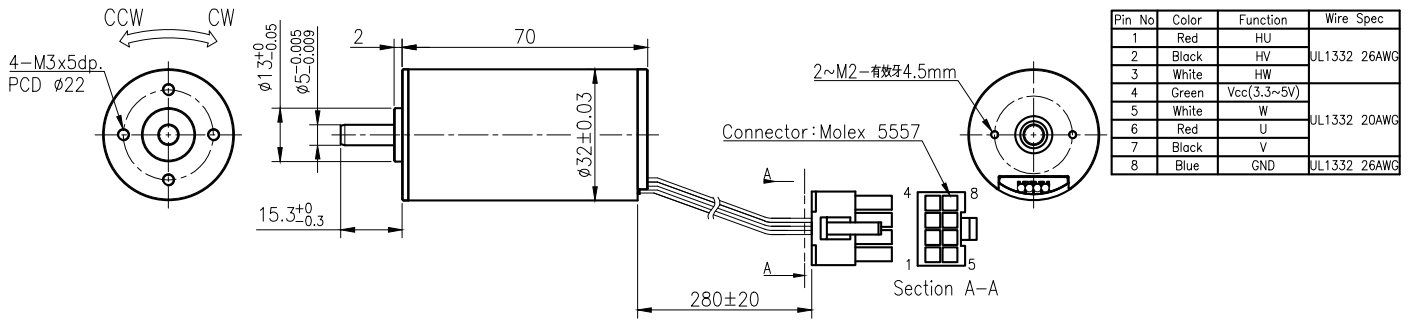


unit:mm

馬達單體型式 / Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (gf-cm)	定格轉速 Rated speed (rpm)	定格電流 Rated current (A)	無負荷轉速 No load speed (rpm)	無負荷電流 No load current (A)	定格出力 Rated output (W)	最大效率 Max. efficiency (%)	重量 Weight (g)
12	500	6000	≤4	7000	≤0.33	30.8	80.5	260
24	500	6000	≤2	7000	≤0.25	30.8	81.0	260

馬達單體特性 / Motor Characteristics

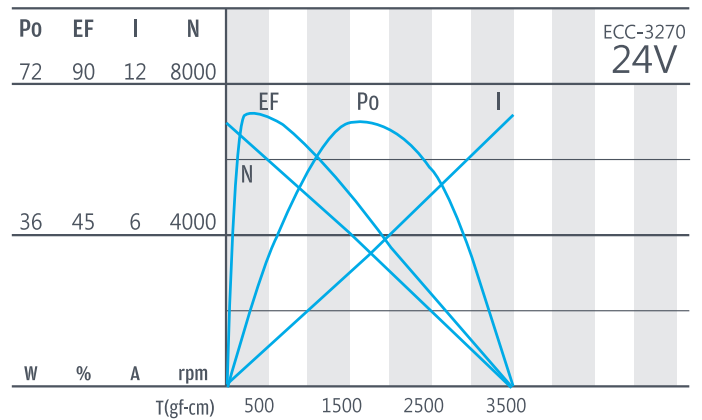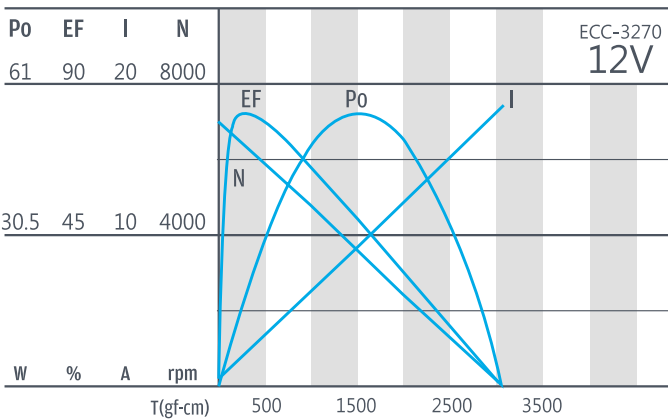

- 使用相對溼度：20%~85%RH
Operating relative humidity
- 使用溫度範圍：-10°C~+60°C
Operating temperature range

PG

IG

Right Angle

RA

RB

WG

SD

BLDC

Encoder