


# PG-32LNGM



## 外形尺寸 / Appearance Size

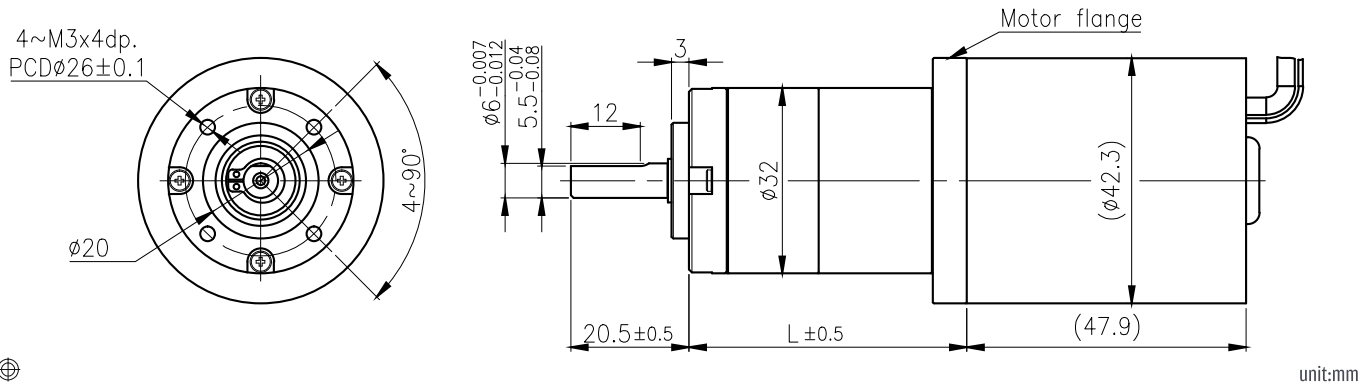

unit:mm

## 齒輪箱馬達轉矩 & 速度 / Gear Motor Torque & Speed

輸出扭力&轉矩 Output torque and speed	減速比	定格扭力	定格轉速	減速比	定格扭力	定格轉速
	Reduction ratio	Rated torque(kgf-cm)	Rated speed(rpm)	Reduction ratio	Rated torque(kgf-cm)	Rated speed(rpm)
	1/14 (13.73)	7.2	218	1/51 (50.90)	24.9	58.9
	1/16 (15.88)	8.3	189	1/59 (58.87)	28.8	51.0
	1/18 (18.37)	9.6	163	1/68 (68.08)	33.4	44.1
	1/19 (19.20)	10.1	156	1/71 (71.17)	34.9	42.2
	1/22 (22.21)	11.7	135	1/79 (78.73)	38.6	38.1
	1/25 (25.02)	13.1	120	1/93 (92.71)	40.0	33.5
	1/27 (26.85)	14.1	112	1/95 (95.19)	40.0	32.9
	1/29 (28.93)	15.2	104	1/107 (107.22)	40.0	29.9
	1/35 (34.98)	18.4	86	1/115 (115.09)	40.0	28.2
	1/46 (45.56)	20.0	69	1/130 (129.63)	40.0	25.6
				1/139 (139.15)	40.0	24.1
				1/150 (149.92)	40.0	22.6
				1/169 (168.85)	40.0	20.4
				1/181 (181.26)	40.0	19.1
				1/195 (195.28)	40.0	17.9
				1/236 (236.10)	40.0	15.1
				1/308 (307.55)	40.0	11.8
長度 (mm) Length(L), max		48			58	
齒輪箱馬達重量 Weight(g), approx.		484			511	

## 馬達單體型式 / Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (kgf-cm)	定格轉速 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷轉速 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)
12	0.7	3000	$\leq$ 2900	3800	$\leq$ 500	22
24	0.7	3000	$\leq$ 1500	3800	$\leq$ 300	22

## 馬達單體特性 / Motor Characteristics

