


IG-22PGM

41 & 42 TYPE



外形尺寸/ Appearance Size

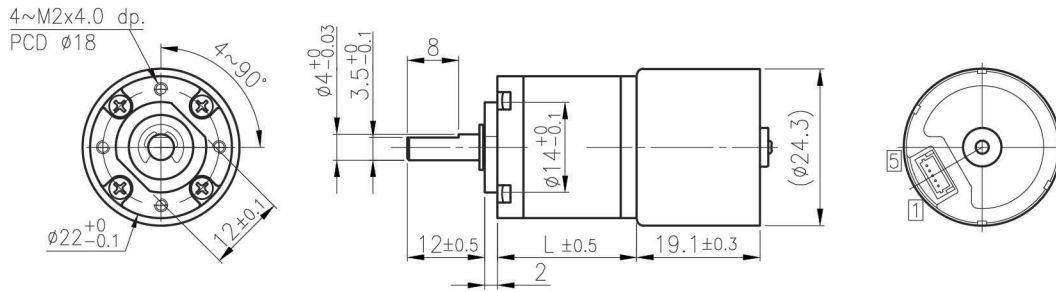

unit:mm

齒輪箱馬達轉矩 & 速度/ Gear Motor Torque & Speed

減速比 Reduction ratio		1/4	1/14	1/16	1/19	1/53	1/62	1/72	1/84	1/104	1/198	1/231	1/270	1/316	1/370	1/455	1/742	1/1014	1/1249	1/1621	1/1996
12V	定格扭力 Rated torque (gf-cm)	100	290	345	400	940	1100	1290	1500	1700	2000	2000	2000	2000	2000	2000	2500	2500	2500	2500	2500
	定格轉速 Rated speed (rpm)	1200	380	320	275	100	85	74	63	51	28	25	22	18	16	13	8	6.1	5.1	4	3.4
24V	定格扭力 Rated torque (gf-cm)	95	270	320	375	885	1030	1200	1400	1700	2000	2000	2000	2000	2000	2000	2500	2500	2500	2500	2500
	定格轉速 Rated speed (rpm)	1437	448	383	328	119	102	87	75	62	35	31	28	25	21.5	17.6	10.9	8	6.5	5.2	4.3
軸心迴轉方向 Rotation direction		CW																			
長度 Length (L)		14.40	18.05				21.70						25.35							29	

馬達單體型式/ Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (gf-cm)	定格轉速 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷轉速 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	30	5340	≤ 310	7400	≤ 180	1.65	28
24	28	6300	≤ 180	8700	≤ 140	1.81	28

馬達單體特性/ Motor Characteristics

