


IG-52HGM

03 & 04 TYPE



外形尺寸/ Appearance Size

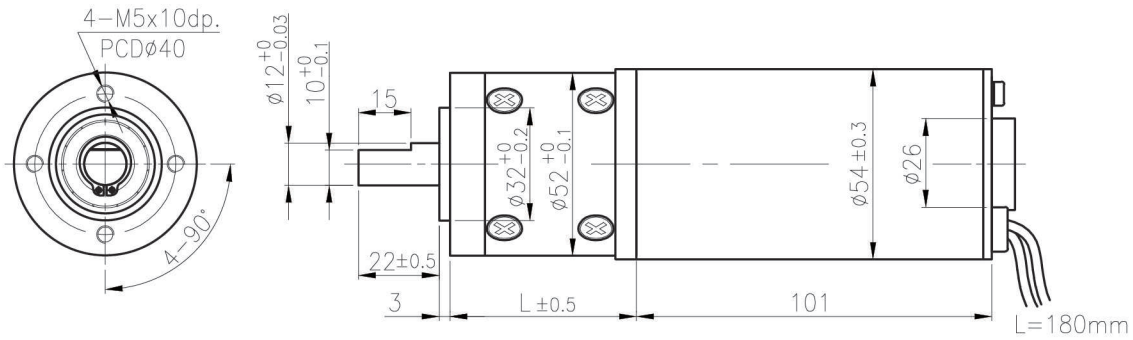

unit:mm

齒輪箱馬達轉矩 & 速度/ Gear Motor Torque & Speed

		1/4	1/5	1/13	1/15	1/19	1/46	1/57	1/67	1/82	1/98	1/114	1/161	1/207	1/288	1/357	1/494	1/552	1/684	
12V	減速比 Reduction ratio	1/4	1/5	1/13	1/15	1/19	1/46	1/57	1/67	1/82	1/98	1/114	1/161	1/207	1/288	1/357	1/494	1/552	1/684	
	定格扭力 Rated torque (kgf-cm)	2.7	3.6	8	9.5	11	24	30	35	44	52	61	72	93	100	100	100	100	100	
24V	定格轉速 Rated speed (rpm)	960	724	275	235	190	78	63	54	44	37	31.7	22.5	17.4	12.7	10.5	7.6	6.7	5.5	
	定格扭力 Rated torque (kgf-cm)	3.9	5.2	11	13	17	35	44	51	64	76	88	100	100	100	100	100	100	100	
軸心迴轉方向 Rotation direction		CW																		
長度 Length (L)		53.0			68.5			84.0			99.5									

馬達單體型式/ Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (gf-cm)	定格轉速 Rated speed (rpm)	定格電流 Rated current (A)	無負荷轉速 No load speed (rpm)	無負荷電流 No load current (A)	定格出力 Rated output (W)	重量 Weight (g)
12	900	3620	≤4.1	4000	≤1.2	33.5	920
24	1300	3550	≤2.85	4000	≤0.7	48.6	920

馬達單體特性/ Motor Characteristics

