


PG-42GM



外形尺寸 / Appearance Size

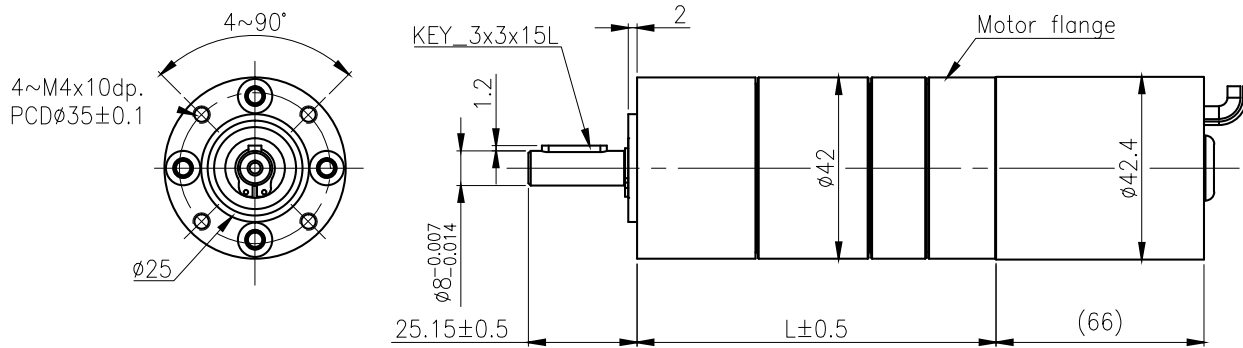

unit:mm

齒輪箱馬達轉矩 & 速度 / Gear Motor Torque & Speed

輸出扭力&轉矩 Output torque and speed	減速比	定格扭力	定格轉速	減速比	定格扭力	定格轉速	減速比	定格扭力	定格轉速
	Reduction ratio	Rated torque(kgf-cm)	Rated speed(rpm)	Reduction ratio	Rated torque(kgf-cm)	Rated speed(rpm)	Reduction ratio	Rated torque(kgf-cm)	Rated speed(rpm)
	1/4 (3.71)	4.2	809	1/14 (13.73)	14.4	218	1/51 (50.90)	49.9	58.9
	1/4 (4.29)	4.8	700	1/16 (15.88)	16.7	189	1/59 (58.87)	57.7	51.0
	1/5 (5.18)	5.8	579	1/18 (18.37)	19.3	163	1/68 (68.08)	66.7	44.1
	1/7 (6.75)	7.6	444	1/19 (19.20)	20.2	156	1/71 (71.17)	69.7	42.2
				1/22 (22.21)	23.3	135	1/79 (78.73)	77.2	38.1
				1/25 (25.02)	26.3	120	1/93 (92.71)	90.9	32.4
				1/27 (26.85)	28.2	112	1/95 (95.19)	93.3	31.5
				1/29 (28.93)	30.4	104	1/107 (107.22)	105.1	28.0
				1/35 (34.98)	36.7	86	1/115 (115.09)	112.8	26.1
				1/46 (45.56)	47.8	66	1/130 (129.63)	127.0	23.1
							1/139 (139.15)	135.0	21.6
							1/150 (149.92)	135.0	20.4
							1/169 (168.85)	135.0	18.6
							1/181 (181.26)	135.0	17.5
							1/195 (195.28)	135.0	16.5
							1/236 (236.10)	135.0	14.0
							1/308 (307.55)	135.0	11.1
長度 (mm) Length(L), max		56.5			70.3			83.8	
齒輪箱馬達重量 Weight(g), approx.		718			830			940	

馬達單體型式 / Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (kgf-cm)	定格轉速 Rated speed (rpm)	定格電流 Rated current (A)	無負荷轉速 No load speed (rpm)	無負荷電流 No load current (A)	定格出力 Rated output (W)
12	1.4	3000	≤5	3800	≤0.7	44
24	1.4	3000	≤2.8	3800	≤0.4	44

馬達單體特性 / Motor Characteristics

