


RB-40GM

03 & 04 TYPE



外形尺寸/ Appearance Size

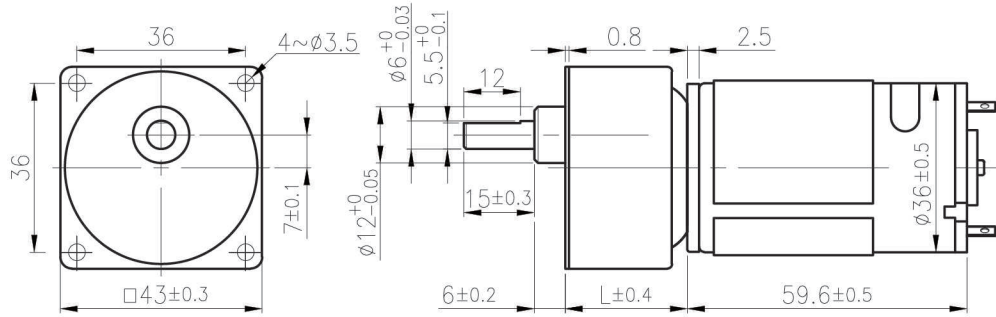

unit:mm

齒輪箱馬達轉矩 & 速度/ Gear Motor Torque & Speed

減速比 Reduction ratio	1/10	1/15	1/18	1/25	1/30	1/36	1/50	1/60	1/75	1/90	1/100	1/120	1/150	1/180	1/200	1/250	1/300	1/360	1/400	1/500
12V 定格扭力 Rated torque (kgf-cm)	1	2.7	3	4	4	4	5	5	5	7	7	7	7	7	7	7	7	7	7	7
12V 定格轉速 Rated speed (rpm)	519	321	275	198	172	145	103	91	72.5	61	54	46	37	31	28.2	22.5	19.2	16	14.5	11.8
24V 定格扭力 Rated torque (kgf-cm)	1	2.6	3	4	4	4	5	5	5	7	7	7	7	7	7	7	7	7	7	7
24V 定格轉速 Rated speed (rpm)	530	340	283	207	176	149	107	92	73	61	54	46	37	31	28.5	23	19.1	16.2	14.5	11.8
軸心迴轉方向 Rotation direction	CCW				CW				CCW				CW							
長度 Length (L)	23.9				26.4				28.9				31.4							

馬達單體型式/ Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (gf-cm)	定格轉速 Rated speed (rpm)	定格電流 Rated current (A)	無負荷轉速 No load speed (rpm)	無負荷電流 No load current (A)	定格出力 Rated output (W)	重量 Weight (g)
12	250	4930	≤ 1.6	6000	≤ 0.25	12.80	220
24	240	5150	≤ 0.75	6000	≤ 0.13	12.70	220

馬達單體特性/ Motor Characteristics

